



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
-----------------	-------------	----------------------	---------------------	------------------

10/666,647

09/19/2003

Young Dae Lee

2101-3053

8504

35884

7590

06/04/2007

LEE, HONG, DEGERMAN, KANG & SCHMADEKA

660 S. FIGUEROA STREET

Suite 2300

LOS ANGELES, CA 90017

EXAMINER

HOANG, HIEU T

ART UNIT

PAPER NUMBER

2152

MAIL DATE

DELIVERY MODE

06/04/2007

PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

<p align="center">Office Action Summary</p>	Application No. 10/666,647	Applicant(s) LEE ET AL.	
	Examiner Hieu T. Hoang	Art Unit 2152	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 21 May 2007.
- 2a) ☒ This action is **FINAL**. 2b) ☐ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-6, 8-10, 12-37, 39 and 41-78 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-6, 8-10, 12-37, 39, 41-78 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. _____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

* See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|--|--|
| 1) <input checked="" type="checkbox"/> Notice of References Cited (PTO-892)
2) <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948)
3) <input type="checkbox"/> Information Disclosure Statement(s) (PTO/SB/08)
Paper No(s)/Mail Date _____. | 4) <input type="checkbox"/> Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____.
5) <input type="checkbox"/> Notice of Informal Patent Application
6) <input type="checkbox"/> Other: _____. |
|--|--|

DETAILED ACTION

1. This office action is in response to the communication filed on 05/21/2007.
2. Claims 7, 11, 38, 40 are canceled.
3. Claims 1-6, 8-10, 12-37, 39, 41-78 are pending.

Response to Arguments

4. Applicant's arguments filed on 05/20/2007 have been fully considered but they are not persuasive.
5. The only main argument is in paragraph 5 on page 14 of the Remarks wherein the applicant argues that Leung does not teach an UMTS networks having a UTRAN with multiple RNCs (SRNC, CRNC, etc.) and "wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC)."

First, that the network is a UMTS network having a UTRAN is not recited in the original claims or in the amended claims.

Second, in response to applicant's arguments against the references individually, one cannot show nonobviousness by attacking references individually where the rejections are based on combinations of references. See *In re Keller*, 642 F.2d 413, 208 USPQ 871 (CCPA 1981); *In re Merck & Co.*, 800 F.2d 1091, 231 USPQ 375 (Fed. Cir. 1986).

In fact, any claims with either one of the limitations "wherein the point-to-point manner is performed in a serving radio network controller (SRNC)" and "the point-to-

Art Unit: 2152

multipoint manner is performed in a controlling radio network controller (CRNC)" are rejected under the combination of arts Leung and applicant admitted prior art (AAPA).

As in the First Office Action, Leung clearly teaches transmitting the header compressed data in a point-to-point manner and in a point-to-multipoint manner depending upon a threshold value, to one or more users of the radio communication system ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B). Furthermore, AAPA further discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages)

One skilled in the art would appreciate that Leung's concept of transmitting the data in a point-to-point or point-to-multipoint based on a threshold level of number of users occupying the network is applicable to any network, including UMTS with special structures such as SRNC and CRNC as described by AAPA.

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

For the rationale above, the claim rejection is maintained.

Claim Rejections - 35 USC § 102

6. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(e) the invention was described in (1) an application for patent, published under section 122(b), by another filed in the United States before the invention by the applicant for patent or (2) a patent granted on an application for patent by another filed in the United States before the invention by the applicant for patent, except that an international application filed under the treaty defined in section 351(a) shall have the effects for purposes of this subsection of an application filed in the United States only if the international application designated the United States and was published under Article 21(2) of such treaty in the English language.

7. Claims 43-45, 49, 50 and 78 are rejected under 35 U.S.C. 102(e) as being anticipated by Leung et al. (US 2003/0087653, hereafter Leung).

8. For claim 43, Leung discloses a method of providing a point-to-multipoint service to a plurality of terminals in a wireless communication system (abstract), the method comprising:

- performing compression of at least part of the at least one header to form a compressed header of the point-to-multipoint service in a one header compression module of a plurality of header compression modules in a network communicating with the plurality of terminals (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6);
- transmitting the compressed header of the point-to-multipoint service to at least one terminal of the wireless communication system, the number of the plurality of terminals is greater than the number of header compression modules in the

network ([0112] lines 1-7, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B, [0068] lines 5-9, figure 2, only one PDSN with a ROHC robust header compression module associated with it, the number of users is definitely larger than the number of header compression modules).

9. For claim 44, Leung further discloses the header is an Internet protocol header ([0068] lines 1-4).

10. For claims 45, Leung further discloses the transmitting by point-to-multipoint manner is via a common channel ([0009] lines 13-15).

11. For claim 49, Leung further discloses the header compression module is associated with a packet data convergence protocol layer of the network ([0068] lines 5-9, ROHC is read as packet data convergence protocol, and PDSN is read as a radio network controller that carries out header compression).

12. For claim 50, Leung further discloses the header compression module is associated with a controlling radio network controller ([0068] lines 5-9, packet data service node PDSN is read as a radio network controller that carries out header compression).

Art Unit: 2152

13. For claims 78, Leung further discloses the multicast service is multimedia broadcast/multicast service (MBMS) ([0051] lines 1-4, HSBS is a multicast service by the term "broadcast", also see figure 2 video audio content to be transmitted over a broadcast service).

Claim Rejections - 35 USC § 103

14. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

15. Claims 1-6, 8-10, 12-37, 39, and 41, 42, 46-48, and 51-77 are rejected under 35 U.S.C. 103(a) as being unpatentable over Leung in view of Applicant Admitted Prior Art (background of the invention in the application, hereafter AAPA).

16. For claim 1, Leung discloses a method for providing multicast services in a radio communication system (abstract), the method comprising:

- performing Internet protocol header compression to form header compressed data (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6); and
- transmitting the header compressed data in at least one of a point-to-point manner and in a point-to-multipoint manner depending upon a threshold value, to one or more users of the radio communication system ([0111] lines 9-14, and

Art Unit: 2152

[0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

17. For claim 18, Leung discloses method of receiving data of a multicast service in a radio communication system (abstract), the method comprising:

- receiving header compressed data ([0068] lines 1-6) in a point-to-point manner and in at least one of a point-to-multipoint manner depending upon a threshold value ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B);

Art Unit: 2152

- decompressing the received header compressed data to allow a user to access the multicast service ([0068] lines 9-12).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

18. For claim 28, Leung discloses in a radio communication system for providing and receiving data of a multicast service (abstract), a radio network controller comprising:

- a header compressing portion that performs Internet protocol header compression (figure 4 step t3, [0065] lines 9-14, [0068] lines 2-4, robust header compression ROHC compresses IP data headers); and
- a transmitting portion that transmits the header compressed data in point-to-point manner and in at least one a point-to-multipoint manner depending upon a threshold value, to one or more users of the radio communication system ([0111]

lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B);

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

19. For claim 35, Leung discloses in a radio communication system for providing and receiving data of a multicast service (abstract), a user equipment comprising:

- a receiving portion, that receives in a point-to-point manner and in a point-to-multipoint manner, Internet protocol header compressed data ([0068] lines 1-5, a mobile station MS receives header compressed data, [0111] lines 9-14 and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B);

Art Unit: 2152

- a header decompressing portion operatively connected with the receiving portion, the header decompressing portion decompressing the header compressed data to access the multicast service ([0068] lines 9-12).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

20. For claim 42, Leung discloses a method for providing multicast services in a radio communication system (abstract), the method comprising:

- performing Internet protocol header compression to form header compressed data (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6);
- transmitting the header compressed data in at least one of a point-to-point manner and a point-to-multipoint manner according to a type of multicast service

Art Unit: 2152

to one or more users in the radio communication system ([0112] lines 1-7, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

21. For claim 46, Leung discloses the invention as in claim 43. Leung further discloses the compressed header of the point-to-multipoint service is transmitted to the plurality of terminals in one of a point-to-point and a point-to-multipoint manner ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

22. For claim 47, Leung-AAPA discloses the invention as in claim . Leung-AAPA further discloses the selection of one of the point-to-point manner and the point-to-multipoint manner is determined using a predetermined requirement associated with a number of terminals communicating with the network (Leung, [0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

23. For claim 51, Leung discloses a method of providing Internet protocol header information to a plurality of terminals in a wireless communication system (abstract), the method comprising:

Art Unit: 2152

- performing header compression of Internet protocol header information to form compressed header data (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6); and
- transmitting the compressed header data to at least one terminal of the communication system in at least one of a point-to-point manner and a point-to-multipoint manner depending upon a threshold value ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

Art Unit: 2152

24. For claim 59, Leung discloses a method of providing internet protocol header information to a plurality of terminals in a wireless communication system (abstract), the method comprising:

- performing compression of internet protocol header information to form compressed header data and providing the compressed header data on a common logical channel (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6; [0049] lines 1-4, a high speed broadcast service (HSBS) channel is a common logical channel);
- transmitting the compressed header data to a plurality of terminals in at least one of a point-to-point manner and a point-to-multipoint manner wherein the compressed header data is mapped to a common physical channel accessible by a plurality of terminals ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B, [0112] lines 1-7, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B; [0049] lines 7-10, a broadcast channel is a common physical channel); and
- receiving and decompressing the compressed header data on the common physical channel at the plurality of terminals ([0068] lines 9-12).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

25. For claim 65, Leung discloses a method of providing internet protocol header information in a wireless communication system (abstract), the method comprising:

- providing internet protocol header information from an internet protocol module to a header compression module associated with one of serving network control equipment and controlling network control equipment ([0068] lines 5-6, IP packet headers are compress at packet data service node PDSN using robust header compression protocol ROHC, the PDSN is read as either serving network control equipment or controlling network control equipment);

Art Unit: 2152

- performing compression of the internet protocol header information in the header compression module to form compressed header data (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6); and
- transmitting the compressed header data to at least one terminal of the communication system in at least one of a point-to-point manner and a point-to-multipoint manner depending upon a threshold value and the compressed header data is provided to a plurality of terminals when the data is transmitted in a point-to-multipoint manner ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

Art Unit: 2152

26. For claim 71, Leung discloses a wireless communication system for providing internet protocol header information to a plurality of terminals (abstract), the wireless communication system comprising:

- a header compression module adapted to receive internet protocol header information from an internet protocol module and compress the internet protocol header information to form compressed header data (figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6);
- a transmitting module adapted to transmit the compressed header data to at least one user of the communication system in at least one of a point-to-point manner and a point-to-multipoint manner depending upon a threshold value ([0111] lines 9-14, and [0112] lines 1-7, a dedicated channel is a unicast or a point-to-point channel, a broadcast channel BC is a multicast or point-to-multipoint channel as in fig. 15B); and a receiving module adapted to receive and decompress the compressed header data ([0068] lines 9-12).

Leung does not disclose: wherein the point-to-point manner is performed in a serving radio network controller (SRNC) and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC).

However, AAPA discloses the point-to-point manner is performed in a serving radio network controller (SRNC) (fig. 5 showing multiple unicast links from SRNCs to User Equipments UE), and the point-to-multipoint manner is performed in a controlling radio network controller (CRNC) (fig. 5, CRNC controls multicast messages).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to conserve the transmission resources by using individual dedicated channels rather than using the broadcast channel (or vice versa) (Leung [0115] lines 8-14).

27. For claims 2, 66, and 74, Leung-AAPA discloses the invention as in claims 1, 65, and 71. Leung-AAPA further discloses the point-to-point manner is employed if a total number of users within a cell is below the threshold value (Leung, fig. 16 steps 904, 910, and 912).

28. For claims 3, 67, and 75, Leung-AAPA discloses the invention as in claims 1, 65, and 71. Leung-AAPA further discloses the point-to-multipoint manner is employed if a total number of users within a cell is at or above the threshold value (Leung, fig. 16 steps 904 and 906).

29. For claims 4, 30, and 37, Leung-AAPA discloses the invention as in claims 1, 28, and 35. Leung-AAPA further discloses the Internet protocol header compression is respectively performed for each type of multicasting service to be provided (Leung, figure 4 step t3, [0065] lines 9-14, [0068] lines 5-6).

30. For claims 5 and 19, Leung-AAPA discloses the invention as in claims 1 and 28. Leung-AAPA further discloses the point-to-point manner is transmitting data from a

Art Unit: 2152

single sending point to a single receiving point (Leung, fig. 15A, each dedicated channel links between one BSC and 1 MS).

31. For claims 6 and 20, Leung-AAPA discloses the invention as in claims 5 and 19. Leung-AAPA further discloses the point-to-point manner is based upon a total number of users within a cell of the radio communication system (Leung, fig. 16 steps 904, 910, and 912).

32. For claim 21, Leung-AAPA discloses the invention as in claim 19. Leung-AAPA further discloses the transmitting by point-to-point manner is via a dedicated channel (Leung, [0111] lines 9-14).

33. For claims 9, 22, 53, and 72, Leung-AAPA discloses the invention as in claims 1, 51, and 71. Leung-AAPA further discloses the point-to-multipoint manner is transmitting data from a single sending point to multiple receiving points (Leung, [0111] lines 1-3).

34. For claims 10 and 23, Leung-AAPA discloses the invention as in claims 9 and 22. Leung-AAPA further discloses the point-to-multipoint manner is based upon a total number of users within a cell of the radio communication system (Leung, fig. 16 steps 904 and 906).

Art Unit: 2152

35. For claims 13, Leung-AAPA discloses the invention as in claim 1. Leung-AAPA further discloses the header compression is performed at a central location for each type of multicast service (Leung, [0033] lines 3-6 and [0068] lines 5-6, a PDSN is read as a central location).

36. For claims 16 and 25, Leung-AAPA discloses the invention as in claims 1 and 18. Leung-AAPA further discloses a multicast service is a service that is provided to a specified plurality of users (Leung, [0111] lines 1-5, a group call is a multicast application to members of a group).

37. For claim 69, Leung-AAPA discloses the invention as in claim 65. Leung-AAPA further discloses the transmission of the compressed header data to the at least one terminal comprises a multicast service (Leung, [0111] lines 1-5).

38. For claims 17, 26, and 70, Leung-AAPA discloses the invention as in claims 16, 25, and 69. Leung-AAPA further discloses the multicast service is multimedia broadcast/multicast service (MBMS) (Leung, [0051] lines 1-4, HSBS is a multicast service by the term "broadcast", also see figure 2 video audio content to be transmitted over a broadcast service).

39. For claim 52, Leung-AAPA discloses the invention as in claim 51. Leung-AAPA further discloses header compression is performed once for the data transmitted to a

plurality of terminals when the data is transmitted in a point-to-multipoint manner (Leung, [0068] lines 5-9, the PDSN provides header compression once using ROHC protocol).

40. For claim 54, Leung-AAPA discloses the invention as in claim 51. Leung-AAPA further discloses the threshold value is associated with a number of terminals (Leung, [0111] lines 9-14, and [0112] lines 1-7).

41. For claim 63, Leung-AAPA discloses the invention as in claim 59. Leung-AAPA further discloses the compressed header data is transmitted to the plurality of terminals in the point-to-multipoint manner over a wireless path (Leung, figure 1, a wireless network, abstract).

42. For claim 73, Leung-AAPA discloses the invention as in claim 71. Leung-AAPA further discloses the header compression module is associated with one of serving network control equipment and controlling network control equipment (Leung, [0068] lines 5-9, packet data service node PDSN is read as a network controller equipment that carries out header compression).

43. For claim 77, Leung-AAPA discloses the invention as in claim 71. Leung-AAPA further discloses the header compression module is part of a controlling radio network

Art Unit: 2152

controller (Leung, [0068] lines 5-9, packet data service node PDSN is read as a network controller equipment that carries out header compression).

44. For claims 29, 57, 61, 68, and 76, Leung-AAPA discloses the invention as in claims 28, 51, 59, 65, and 71. Leung-AAPA further discloses the header compressing portion is a packet data convergence protocol (PDCP) entity (AAPA, figure 5, PDCP entity compresses headers at SRNCs).

45. For claim 31, the claim is rejected for the same rationale as in claim 28.

46. For claims 8 and 39, Leung-AAPA discloses the invention as in claim 5 and 35. Leung-AAPA further discloses the transmitting by point-to-point manner is via a dedicated channel (Leung, [0111] lines 9-14).

47. For claims 33, 58, and 62, the claim is rejected for the same rationale as in claim 28.

48. For claims 12, 24, 41, and 55, Leung-AAPA discloses the invention as in claims 9, 22, 35, and 51. Leung-AAPA further discloses the transmitting by point-to-multipoint manner is via a common channel (Leung, [0009] lines 13-15).

Art Unit: 2152

49. For claim 14, Leung-AAPA discloses the invention as in claim 13. Leung-AAPA further discloses the central location is a packet data convergence protocol (PDCP) entity (Leung, [0068] lines 4-12, the central location is a robust header compression protocol entity a ROHC, in substitution with AAPA, (figure 5, PDCP entities), PDCP is a well-known header compression protocol), wherein one DPCP entity exists and is employed for multiple users (Leung, [0068] lines 5-6, a PDSN is read as a central location, fig. 2 one PDSN implements header compression for all MSs).

50. For claim 15, Leung-AAPA discloses the invention as in claim 14. Leung-AAPA further discloses the PDCP entity is located within a controlling radio network controller (CRNC) (Leung, [0068] lines 1-12, ROHC is read as PDCP, and PDSN is read as CRNC).

51. For claim 27, Leung-AAPA discloses the invention as in claim 18. Leung-AAPA further discloses the header decompressing is performed at a packet data convergence protocol (PDCP) entity (Leung, the header decompressing is performed at a robust header compression protocol entity ([0068] lines 9-12, the decompressor in the MS using ROHC to decompress the received headers, in substitution with AAPA, figure 5, PDCP decompresses received compressed headers at terminal UE), wherein one DPCP entity exists and is employed for multiple users (Leung, [0068] lines 5-6, a PDSN is read as a central location, fig. 2 one PDSN implements header compression for all MSs).

52. For claim 36, Leung-AAPA discloses the invention as in claim 35. Leung-AAPA further discloses the header decompressing is performed at a packet data convergence protocol (PDCP) entity (Leung, the header decompressing is performed at a robust header compression protocol entity ([0068] lines 9-12, the decompressor in the MS using ROHC to decompress the received headers, AAPA, figure 5, PDCP decompresses received compressed headers at terminal UE)

53. For claim 32, Leung-AAPA discloses the invention as in claim 31. Leung-AAPA further discloses the SRNC transmits via a dedicated transport channel (Leung, [0111] lines 9-14).

54. For claim 34, Leung-AAPA discloses the invention as in claim 33. Leung-AAPA further discloses the CRNC transmits via a common transport channel (Leung, [0009] lines 13-15).

55. For claims 48, Leung discloses the invention as in claim 43. Leung does not disclose at least part of the Internet protocol header information is not compressed.

However, AAPA discloses at least part of the Internet protocol header information is not compressed (page 6 line 25 - page 7 line 5, only the absolutely necessary information required in the header is compressed).

Therefore, it would have been obvious for one skilled in the art at the time of the invention to combine the teachings of Leung with the teachings of AAPA to compress only necessary portions of packet headers to conserve the system resources and time because compressing and decompressing of information takes time and resources.

56. For claims 56, and 60, the claims are rejected for the same rationale as in claim 48.

57. For claim 64, Leung-AAPA discloses the invention as in claim 59. Leung-AAPA further discloses the compression of the internet protocol header information and mapping of the compressed header data to the common physical channel is over a wired path (AAPA, page 6 line 25 – page 7 line 1).

Conclusion

58. Applicant's amendment necessitated the new ground(s) of rejection presented in this Office action. Accordingly, **THIS ACTION IS MADE FINAL**. See MPEP § 706.07(a). Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire **THREE MONTHS** from the mailing date of this action. In the event a first reply is filed within **TWO MONTHS** of the mailing date of this final action and the advisory action is not mailed until after the end of the **THREE-MONTH** shortened statutory period, then the

Art Unit: 2152

shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than SIX MONTHS from the date of this final action.

59. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Hieu T. Hoang whose telephone number is 571-270-1253. The examiner can normally be reached on Monday-Thursday, 8 a.m.-5 p.m., EST.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Bunjob Jaroenchonwanit can be reached on 571-272-3913. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

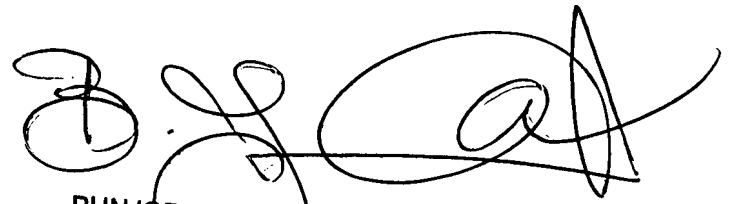
Application/Control Number: 10/666,647

Page 27

Art Unit: 2152

HH

HH


BUNJOB JAROENCHONWANIT
SUPERVISORY PATENT EXAMINER 5/29/07